

PRODUCT - INFORMATION

Quality Products

MADE IN GERMANY

by your famous brand

K SPRITZTECHNIK T
KOPPERSCHMID

Topic: Pneumatic-lifter 200 liter


Product: Various options for pneumatic-lifter

Ausführungsvarianten Pneumatik-Lifter 200L_PL_E

Stand: 04/2018

all rights reserved

Various options for pneumatic-lifter 200 liter

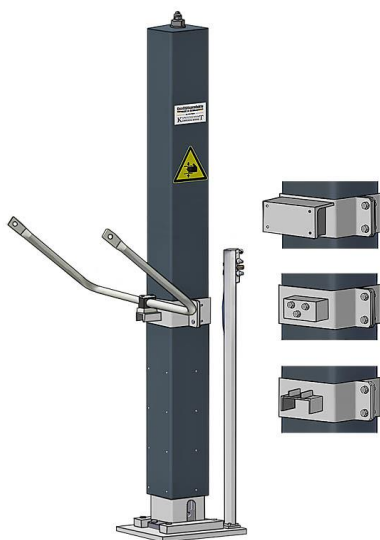

Pneumatic-lifter for 200 liter barrel „basic version“:

89001 031000

Single lifter column with anti-twist design; basic version with lid holder (*without lid*); single-lever control.

Supporting column powder-coated in RAL 7016 anthracite gray fine structure. Other parts in RAL 7035, light gray, matt.

Version with standard pneumatic cylinder.

Bandages:

89001 031000-BF

Bandages with L-section for pumps

89001 031000-BA

Bandages with mounting block for lid

89001 031000-B9


Bandages with support rail for lid staytube



Control panel:

89001 031000-S1R

Control panel for 2 hands operation
Safety option 1

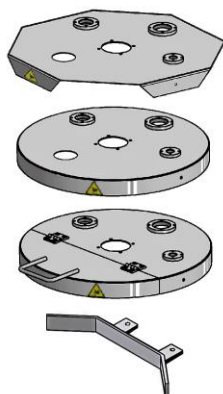

Lid versions: (all lids come in stainless steel)

89001 000005

Lid for lift 200 liter barrel, octagonal

89001 000010

Lid for lift 200 liter barrel, circular version

89001 000015

Lid for lift 200 liter barrel, 1/3 hinged

89001 000000-O1

Stop bracket for 200 liter barrel,
powder coated RAL 7031

89001 000000-O1A

Stop bracket for 200 liter barrel,
stainless steel version

PRODUCT - INFORMATION

Quality Products

MADE IN GERMANY

by your famous brand

K SPRITZTECHNIK **T**
KOPPERSCHMID

Topic: Pneumatic-lifter 200 liter

Product: Various options for pneumatic-lifter

Ausführungsvarianten Pneumatik-Lifter 200L _E_PI

Stand: 04/2018


all rights reserved

Various options for pneumatic-lifter 200 liter



Lid flange:

- | | |
|--------------------------|--|
| 15012 004810 | Mounting flange for pneumatic agitator motor 4Nm |
| 89001 000015-03.3 | Mounting flange with G2" internal thread for barrel pump or retaining ring |
| 15006 000032 | Retaining ring with 2" external thread for suction pipe |
| 89001 000015-03.4 | Mounting flange with G1 ½" internal thread for fluid level sensor |
| 15006 000030 | Retaining ring without thread for suction pipe |
| 89001 000015-03.5 | Mounting flange with G3/4" internal thread and return pipe |

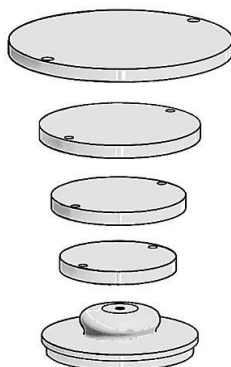

Blank flanges:

- | | |
|--------------------------|---------------------------------------|
| 89001 000000-D125 | Blank flanges (agitator opening) |
| 89001 000000-D090 | Blank flanges (suction pipe opening) |
| 89001 000000-D075 | Blank flanges (sensor opening) |
| 89001 000000-D065 | Blank flanges (recirculation opening) |
| 89001 000000-D087 | Blank flanges (spyhole opening) |

Safety options:

Safety option 1:

control panel equipped with contacts for **2-hand operation** when lowering the lift.

Safety option 2:

supply air turn off function for agitator and pump if the lid is not in its lower position.

Safety option 3:

lockable ball valve for safe air shut off in case of service jobs and permanent unserviceability.

Safety option 4:

pneumatic cylinder with **ATEX** certificate.