

# PRODUCT - INFORMATION

**Topic:** Pneumatic-lifter 200 liter

**Product:** Various options for pneumatic-lifter

Ausführungsvarianten Pneumatik-Lifter 200L\_PI\_E

Stand: 01/2026

all rights reserved


**Quality Products**

MADE IN GERMANY

by your famous brand

**K** SPRITZTECHNIK **T**  
KOPPERSCHMID

## Various options for pneumatic-lifter 200 liter

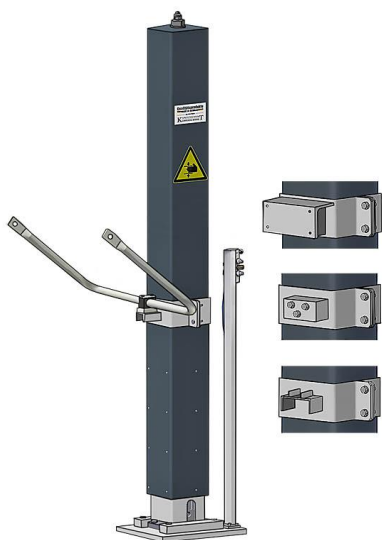

### Pneumatic-lifter for 200 liter barrel „basic version“:

**89001 031000**

Single lifter column with anti-twist design; basic version with lid holder (*without lid*); single-lever control.

Supporting column powder-coated in RAL 7016 anthracite gray fine structure. Other parts in RAL 7035, light gray, matt.

Version with standard pneumatic cylinder.

### Bandages:

**89001 031000-BF**

Bandages with L-section for pumps

**89001 031000-BA**

Bandages with mounting block for lid

**89001 031000-B9**


Bandages with support rail for lid staytube



### Control unit:

**89001 031000-S1R**

Control unit for 2 hands operation  
**Safety option 1**

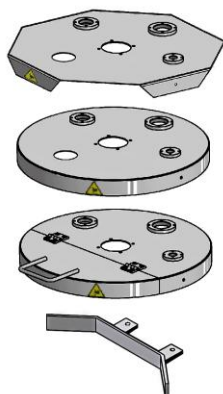

### Lid versions: (all lids come in stainless steel)

**89001 000005**

Lid for lift 200 liter barrel, octagonal

**89001 000010**

Lid for lift 200 liter barrel, circular version

**89001 000015**

Lid for lift 200 liter barrel, 1/3 hinged

**89001 000000-O1**

Stop bracket for 200 liter barrel,  
powder coated RAL 7031

**89001 000000-O1A**

Stop bracket for 200 liter barrel,  
stainless steel version

# PRODUCT - INFORMATION

**Topic:** Pneumatic-lifter 200 liter

**Product:** Various options for pneumatic-lifter

Ausführungsvarianten Pneumatik-Lifter 200L\_PI\_E

Stand: 01/2026

all rights reserved


**Quality Products**

MADE IN GERMANY

by your famous brand


**K** SPRITZTECHNIK **T**  
**KOPPERSCHMID**

## Various options for pneumatic-lifter 200 liter

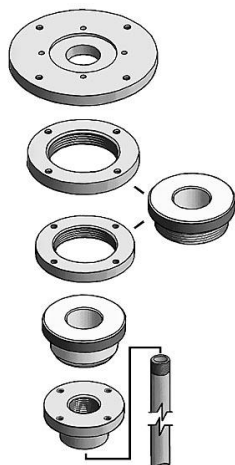

### Lid flange:

- |                          |  |
|--------------------------|--|
| <b>15012 004810-01N</b>  | Mounting flange for pneumatic agitator motor 4Nm                           |
| <b>89001 000015-03.3</b> | Mounting flange with G2" internal thread for barrel pump or retaining ring |
| <b>15006 000032</b>      | Retaining ring with 2" external thread for suction pipe                    |
| <b>89001 000015-03.4</b> | Mounting flange with G1 ½" internal thread for fluid level sensor          |
| <b>15006 000030</b>      | Retaining ring without thread for suction pipe                             |
| <b>89001 000015-03.5</b> | Mounting flange with G3/4" internal thread and return pipe                 |

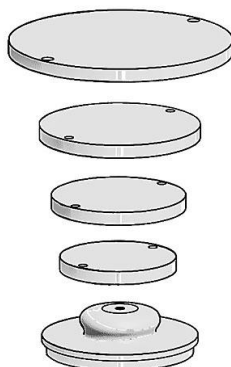

### Blank flanges:

- |                          |                                       |
|--------------------------|---------------------------------------|
| <b>89001 000000-D125</b> | Blank flanges (agitator opening)      |
| <b>89001 000000-D090</b> | Blank flanges (suction pipe opening)  |
| <b>89001 000000-D075</b> | Blank flanges (sensor opening)        |
| <b>89001 000000-D065</b> | Blank flanges (recirculation opening) |
| <b>89001 000000-D087</b> | Blank flanges (spyhole opening)       |

### Safety options:

#### Safety option 1:

control unit equipped with contacts for **2-hand operation** when lowering the lift.

#### Safety option 2:

**supply air turn off** function for agitator and pump if the lid is not in its lower position.

#### Safety option 3:

**lockable ball valve** for safe air shut off in case of service jobs and permanent unserviceability.

#### Safety option 4:

pneumatic cylinder with **ATEX** certificate.